

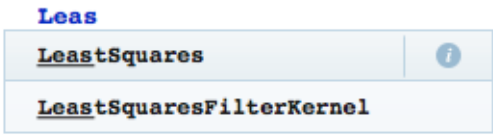
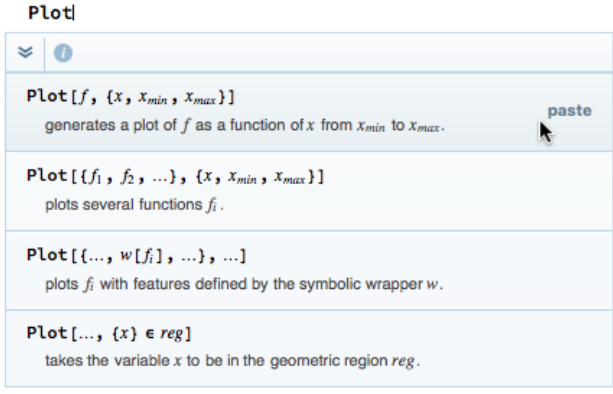
Comparison of Ease-of-Use Features in Mathematica 12 and Maple 2019

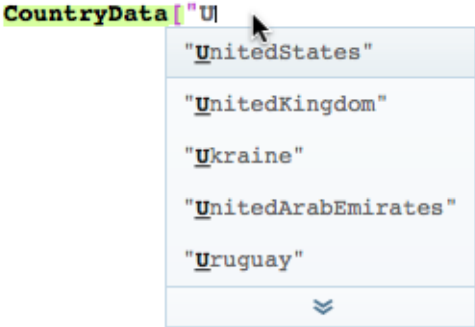

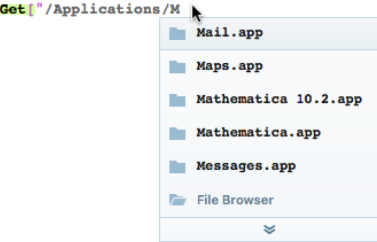
Summary




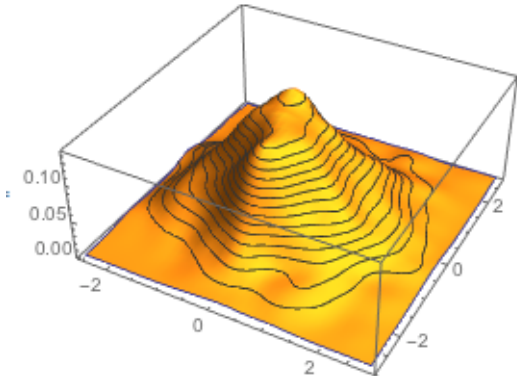
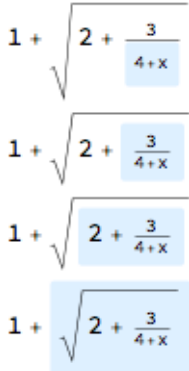
Ensuring ease of operation is particularly important for a system as vast as Mathematica. A steady focus on automation and good user-interface design has meant that Mathematica has become progressively easier to use even as its computational capabilities have grown.

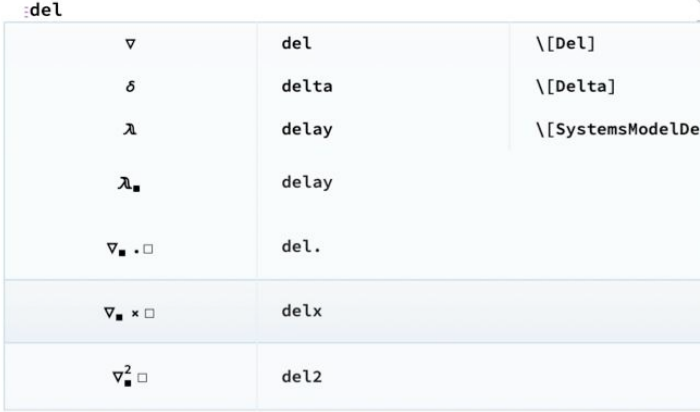


Maplesoft claims that Maple is easier to use than Mathematica, but a systematic cataloging of ease-of-use features shows that Maple supports almost none of the tools, hints or good design principles that are built into Mathematica.

Code editing





Mathematica	Details	Maple
Autocompletion: function names	<p>Start typing a command, and Mathematica automatically provides completion choices. Just press return to save typing the rest.</p>  <p>The screenshot shows a dropdown menu for the command 'Leas'. The first option is 'LeastSquares' with an information icon to its right. The second option is 'LeastSquaresFilterKernel'.</p>	Provided only in code-edit regions not in Worksheets.
Autocompletion: command templates	<p>Mouse over a command or use a keystroke after typing a command, and you are offered standard usage templates. Select one by mouse or keyboard and then tab between the arguments as you fill them in.</p>  <p>The screenshot shows a dropdown menu for the command 'Plot'. It lists four usage templates: 1. 'Plot[f, {x, xmin, xmax}] generates a plot of f as a function of x from xmin to xmax.' with a 'paste' button. 2. 'Plot[{f1, f2, ...}, {x, xmin, xmax}] plots several functions fi.' 3. 'Plot[..., w[fi], ..., ...] plots fi with features defined by the symbolic wrapper w.' 4. 'Plot[..., {x} ∈ reg] takes the variable x to be in the geometric region reg.'</p>	Maple provides templates only via keyboard access.

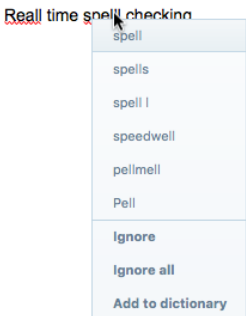
Mathematica	Details	Maple
Autocompletion: strings	<p>Start typing a string in a place where there are finite choices, and Mathematica will offer you autocompletions.</p> 	✘
Autocompletion: iconic preview	<p>Some autocompletions, such as styles, fonts and colors, are shown with visual cues, so you can see what the effect of the choice will be.</p> 	✘
Autocompletion: path browser	<p>Start typing a file name, and Mathematica helps you navigate your files system.</p> 	Provided only in code–edit regions not in Worksheets.

Mathematica	Details	Maple
Inline evaluation	<p>You can evaluate part of an input expression in place to simplify your input without having to do a side calculation.</p> <pre>data = {1, 2 + 3 + 4 + 5, 6} → data = {1, 14, 6}</pre>	✘
Generalized input	<p>You can use any formatted content in Mathematica input, not just typeset math or text. Input can include images, 3D images, geometry, graphs, color swatches and more. It makes code easier to read.</p> <pre>EdgeDetect[</pre> <pre>ListPlot[{1, 2, 3}, PlotStyle → </pre>	✘
Iconized input	<p>You can collapse large input into an icon that makes your notebooks easier to read while still saving all data in the same file. Use the icon as input, or expand it to see the contents.</p> <pre>data =  Experimental data + ;</pre> <pre>SmoothHistogram3D[data]</pre> 	✘
Extend selection	<p>Multi-click inside a math expression or use a keyboard shortcut to extend the selection in a mathematically valid way.</p> 	✘
Custom notations	<p>You can create your own 2D mathematical typeset notations for input or output.</p>	✘
Edit during evaluation	<p>In Mathematica, you can continue to edit the working document while long calculations are being performed.</p>	✘

Mathematica	Details	Maple
Customizable input aliases	<p>You can set up your own aliases for any content that you type or insert frequently. These can insert text, typeset math or images. Aliases also appear on the auto-completion prompts. Mathematica comes with a collection of predefined shortcuts. For example, type “<code>ESC del</code>” and the autocompletion shows:</p>  <p>Click on the auto-complete or finish typing “<code>ESC del2 ESC</code>” and the 2D structure using the Del character (Unicode 8711) and placeholders appears in its place:</p> 	

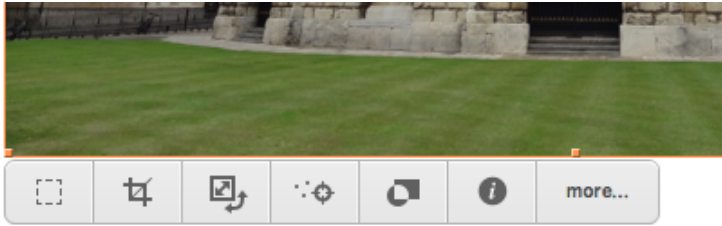
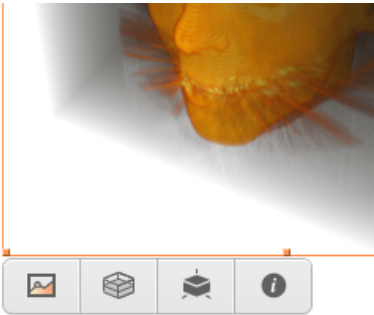
Error detection


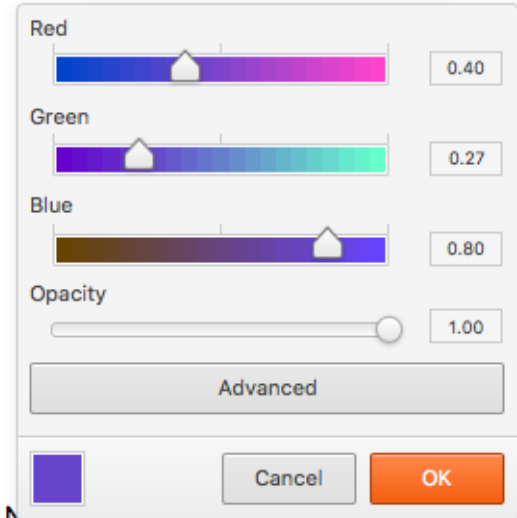

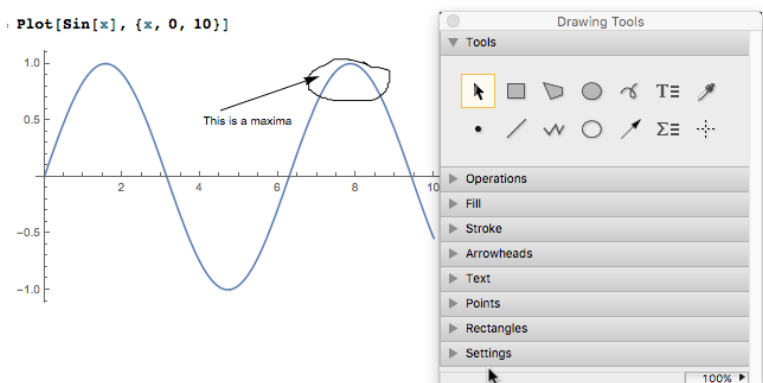




Mathematica	Details	Maple
Syntax coloring: bracket matching	<p>Mismatched brackets are automatically colored to highlight the error.</p> <p>Sin [x + Cos [x]</p>	
Syntax coloring: missing arguments	<p>Functions that require more arguments than you have provided are highlighted with a marker.</p> <p>Mod [3 ^]</p>	
Syntax coloring: excess arguments	<p>If you enter too many arguments for a function, Mathematica highlights the excess arguments.</p> <p>Sin [2 , 3]</p>	
Syntax coloring: undefined symbols	<p>Undefined symbols (usually because you have misremembered or misspelled a function name) are automatically colored blue.</p> <p>Plott [Sin [x] , { x , 0 , 10 }]</p>	

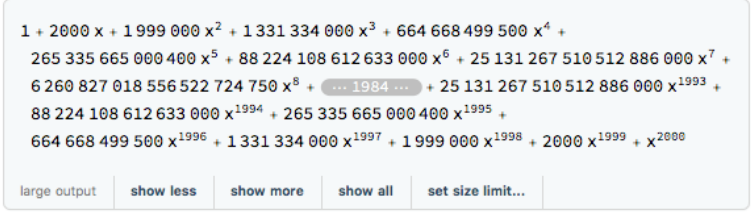

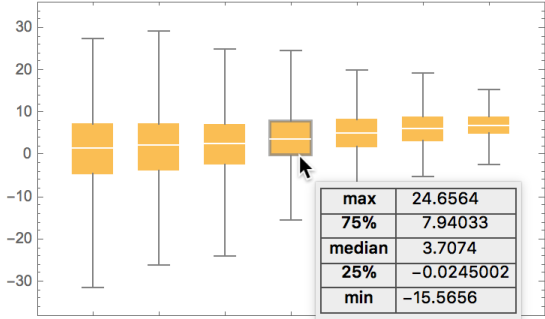

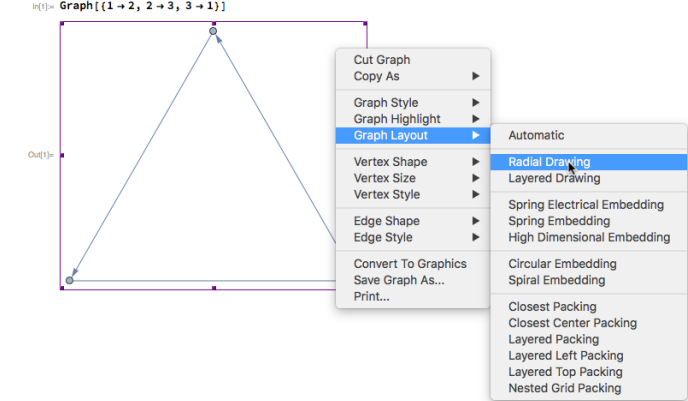

Mathematica	Details	Maple
Syntax coloring: unrecognized options	Mathematica automatically highlights option names that do not apply where you have entered them. Plot [Sin [x], { x , 0, 10}, PlotArea → 100]	✘
Syntax coloring: scoping conflicts	If you try to localize the same variable name twice, Mathematica highlights it to warn you. With [{ local = 1}, With [{ local = 2}, local]	Parsing errors are reported in a dialog for code–edit regions only.
Syntax coloring: code comments	Comments are automatically colored gray so that they are easily distinguished from code. x = 2; (*Comment*)	✘
Syntax coloring: string content	Strings are colored dark gray to distinguish them in your code. text = "some text"	✘
Syntax coloring: current function	The start and end of the function immediately surrounding the cursor are highlighted automatically so that you can more clearly see where you are in complex nested expressions. Sin [x + Cos [x + 1] + Sin [x] +.]	✘
Number formatting	Mathematica automatically displays long numbers with additional spacing between digit blocks to make them easier to read. 1 234 567 890	✘
Real–time spellchecking	Mathematica automatically underlines misspelled words as soon as you have typed them. 	In Maple, you must manually invoke spellchecking.

Mathematica	Details	Maple
Visual hinting of computation dependency	Both Mathematica's and Maple's interfaces provide REPL interfaces where outputs are displayed alongside inputs. If you edit the input without reevaluating it so the output no longer matches, Mathematica warns you by automatically fading the out-of-date output.	✘
Error source feedback	<p>Error messages in Mathematica are accompanied by a "Stack Trace" button that displays information on the computational history that led to the error.</p> <pre>In[76]:= customfunction[1]</pre> <p style="color: red;">... Power: Infinite expression $\frac{1}{0}$ encountered.</p> <pre>Out[76]=</pre> <div style="border: 1px solid gray; padding: 5px; margin: 5px 0;"> <p style="text-align: center; margin: 0;">Stack Trace for Power::infy</p> <p>Message[Power::infy, $\frac{1}{0}$]</p> <hr/> <p style="text-align: center;">$\frac{1}{0}$</p> <hr/> <p style="text-align: center;">$\frac{1}{0}$</p> <hr/> <p>myfn[1 - 1] + 1</p> </div>	✘

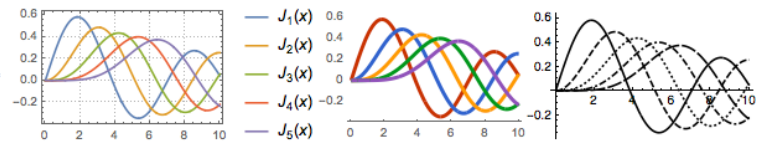
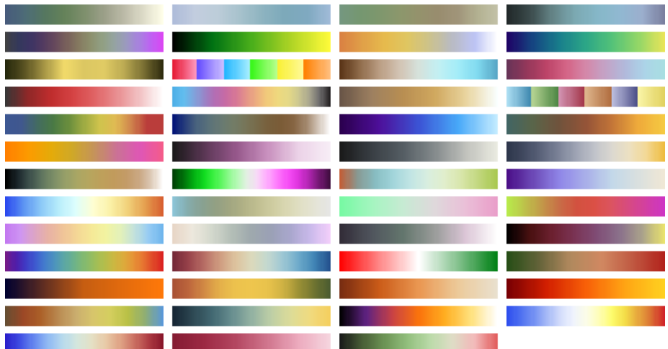
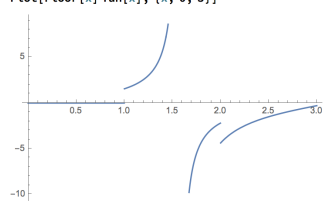
Interacting with output

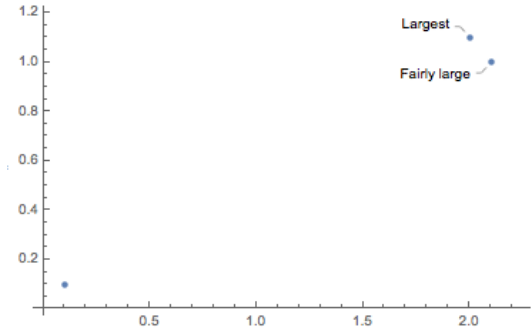

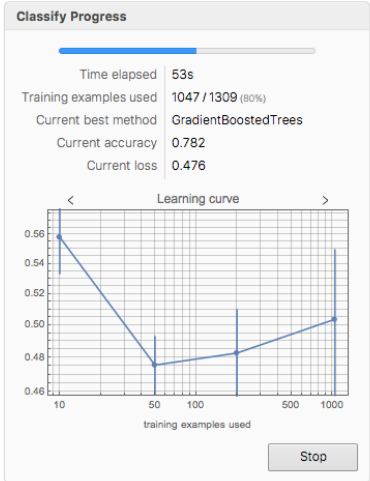

Mathematica	Details	Maple
Image editor	<p>Click any image in Mathematica, and a toolbar automatically appears providing point-and-click tools for selecting regions, cropping, transforming, masking, image information and more.</p> 	✘
Image editor 3D	<p>Click a 3D image (voxel data), and a toolbar appears providing point-and-click tools for coloring, clipping, information and more.</p> 	Maple does not support 3D images.

Mathematica	Details	Maple
Color swatches	<p>Colors appear as visual swatches. Mouse over them for numeric specification, or click them to interact with the values.</p> <pre>In[5]:= Blend[{Darker[Red], Lighter[Blue]}, 0.8]</pre> <p>Out[5]= </p> 	
Drawing tools	<p>You can manually annotate graphics and edit generated graphics elements in Mathematica using a drawing tools palette.</p> 	
Elided forms	<p>Many computations return complex results that are intended as inputs for further computation. Mathematica provides a uniform way to present the key information for these while hiding excess details. For large expressions, you can decide whether all information necessary to repeat the computation is stored in the elided display, or only summary information.</p> <pre>InterpolatingFunction [ Domain: {{1., 100.}} Output: scalar]</pre> <pre>SparseArray [ Specified elements: 100 Dimensions: {10000, 10000}]</pre> <pre>TimeSeries [ Time: 1 to 15 Data points: 6]</pre>	<p>Maple provides similar functionality for arrays and graphs only. When Maple presents summary displays, the information to reproduce the output is discarded.</p>

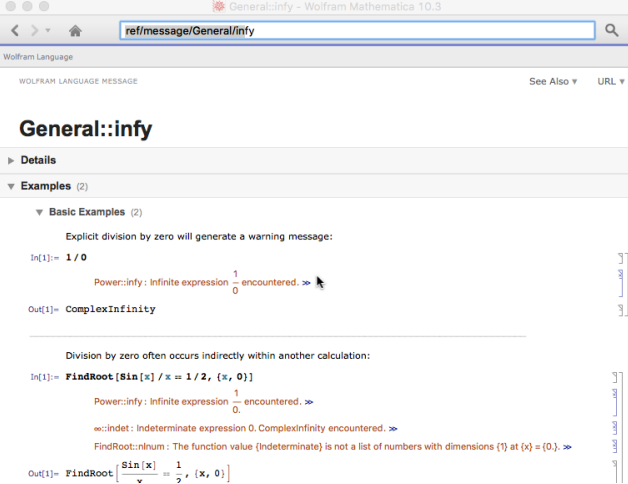





Mathematica	Details	Maple
<p>Large-output suppression</p>	<p>When any very large expression is returned to the notebook, Mathematica automatically presents a compact view that displays the start and end of the expression and an indication of the amount of omitted content. The following example would take around 300 pages to fully display.</p> <p>Expand [(1 + x)²⁰⁰⁰]</p> 	
<p>Tooltips in graphics</p>	<p>Mathematica graphics incorporate tooltips to provide extra information without increasing the complexity of the image. For example, mouse over a box in a box-whisker plot, and you get statistics on that dataset.</p> 	
<p>Context-sensitive menus</p>	<p>The menu that appears when you right-click content depends on the type of content selected.</p> 	

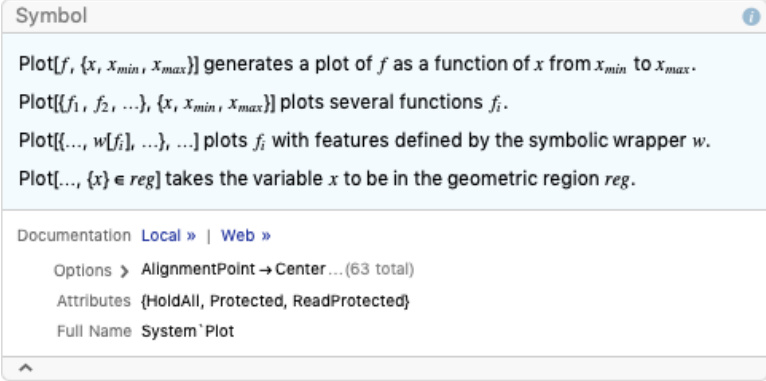




Automation & convenience

Mathematica	Details	Maple
Predefined document styles	Mathematica provides over 20 document stylesheets that collect together coherent style choices for title, section, text, math, etc. to let you create a great-looking document quickly. You can also create your own stylesheet.	Maple provides only one stylesheet, though you can create your own.
Predefined graphics styles	Mathematica provides a collection of predefined styles as an alternative to setting all of the different options separately. <pre>Row[Plot[Evaluate[Table[BesselJ[n, x], {n, 5}], {x, 0, 10}], PlotTheme -> #] & /@ {"Detailed", "Web", "Monochrome"}]</pre> 	✘
Predefined color schemes	Mathematica provides over 170 named color gradients and collections that can be applied to most visualizations. 	✘
Plotting: automatic range selection	Mathematica plots can automatically choose their plot ranges to ensure that the majority of the plot yields useful information.	Maple provides this functionality only for 2D plots.
Plotting: automatic resampling	Mathematica adaptively increases sampling in 2D and 3D plots in areas of high curvature to give accurate yet efficient visualizations.	Maple provides this functionality only for 2D plots.
Plotting: automatic branch-cut detection	Mathematica automatically detects discontinuities in many plots to accurately depict the break. <pre>Plot[Floor[x] Tan[x], {x, 0, 3}]</pre> 	✘
Plotting: automatic point sizing	By default, Mathematica automatically makes some features, such as points, smaller if there are many of them in a single visualization.	✘

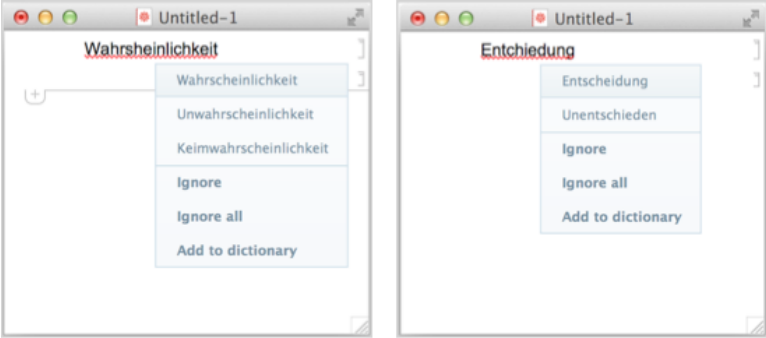
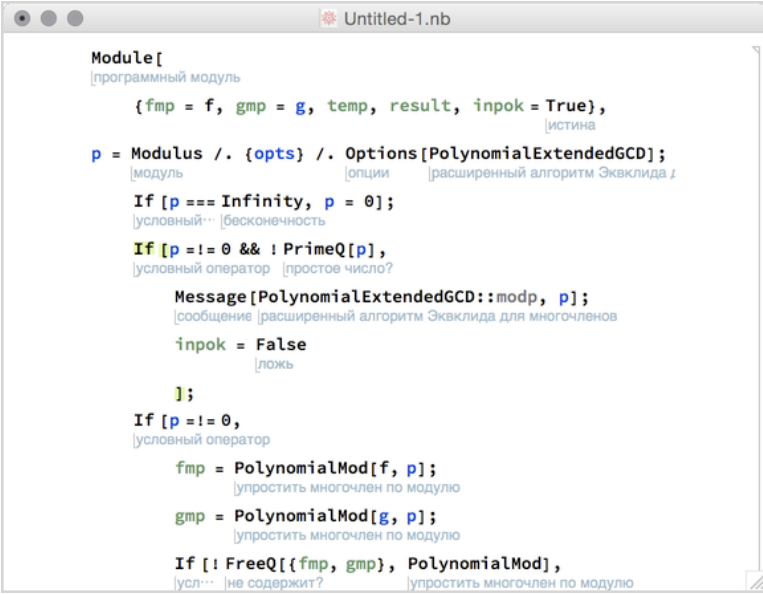

Mathematica	Details	Maple
Plotting: automatic point label positioning	<p>Mathematica can use symbolic wrappers for data points to automatically place labels, callouts or tooltips on plotted points, automatically optimizing their locations to avoid overlap.</p> <pre data-bbox="389 255 963 309">ListPlot[{{0.1, 0.1}, Callout[{2, 1.1}, "Largest"], Callout[{2.1, 1}, "Fairly large"]}]</pre> 	
Automatic import filters	<p>Mathematica supports over 220 different import and export filters for data, images, sound, video, graphs, geometry and more.</p>	<p>Maple supports 56 formats.</p>
Training progress control	<p>When Mathematica's machine learning functions are training, you can see the progress made and quality of predictions achieved. You can manually stop the learning at any time and use the best model found so far.</p> 	

Help

Mathematica	Details	Maple
<p>Help on errors</p>	<p>When an error is generated, it includes a hyperlink to documentation on the error, including example causes.</p> <p>In[43]:= 1 / 0</p> <p>Power::infy : Infinite expression $\frac{1}{0}$ encountered. >></p> 	
<p>Evaluatable help</p>	<p>Mathematica help contains over 10,000 examples. The help also acts as a sandbox where you can edit and experiment with the examples in situ, without changing them permanently.</p>	
<p>Suggestion Bar</p>	<p>Mathematica automatically suggests calculations you may wish to perform next after each calculation. Just click to perform the action. You can even roll together several steps to automatically write programs.</p> <p>Out[12]= {0.470063, 0.150947, 0.43559, 0.805856, 0.312563, 0.482064, 0.663087, 0.507534, 0.609561, 0.271254}</p> 	
<p>Mouseover help box</p>	<p>Mouse over a command in Mathematica and see a tooltip reminding you what the function does and its typical arguments.</p> <p>Solve $x^2 = y$</p> <p>Solve [<i>expr</i>, <i>vars</i>]</p> <p>attempts to solve the system <i>expr</i> of equations or inequalities for the variables <i>vars</i>.</p> <p>Solve [<i>expr</i>, <i>vars</i>, <i>dom</i>]</p> <p>solves over the domain <i>dom</i>. Common choices of <i>dom</i> are Reals, Integers, and Complexes.</p>	

Mathematica	Details	Maple
Command–line help	<p>Evaluating <code>?name</code> returns help on <code>name</code> without leaving the working notebook. Mathematica displays information in an expandable form that organizes basic definitions, options and attributes with links to the full documentation.</p> <p>?Plot</p>  <p>The screenshot shows the Mathematica help for the <code>Plot</code> function. It includes the following text: <ul style="list-style-type: none"> <code>Plot[f, {x, x_{min}, x_{max}}]</code> generates a plot of f as a function of x from x_{min} to x_{max}. <code>Plot[{f₁, f₂, ...}, {x, x_{min}, x_{max}}]</code> plots several functions f_i. <code>Plot[{...}, w[f_i, ...], ...]</code> plots f_i with features defined by the symbolic wrapper w. <code>Plot[...], {x} ∈ reg]</code> takes the variable x to be in the geometric region reg. Below the text, there are links for 'Documentation Local » Web »', 'Options > AlignmentPoint → Center... (63 total)', 'Attributes {HoldAll, Protected, ReadProtected}', and 'Full Name System`Plot'. </p>	
Linguistic input	<p>Type a short English phrase and have Wolfram Alpha translate it into a Wolfram Language expression.</p>  <p>The screenshot shows the Wolfram Alpha interface. An input box contains the text "100 random numbers from 1 to 10" and a plus sign icon. Below the input box, the corresponding Wolfram Language code is displayed: <code>RandomReal[{1, 10}, 100]</code>.</p> <p>You can even do it in the middle of an expression—for example, to choose the right unit names.</p>  <p>The screenshot shows the Wolfram Alpha interface with the text "37 h * 13 miles per hour" entered in the input box. A mouse cursor is pointing at the word "hour".</p>	
Function names	<p>While good programming–language design is too complex to summarize in this document, one simple aspect can be seen in the choice of function names. Mathematica uses a consistent set of naming conventions for its functions, mostly using full English words like <code>FactorInteger</code>, <code>LinearProgramming</code>, <code>Integrate</code>, <code>Counts</code>, <code>ContinuedFraction</code> and <code>Gamma</code>, making code readable and names easier to predict.</p> <p>Maple follows this convention for recently added functions, but most of its older functionality is inconsistent in the use of case and abbreviation, making it harder to learn and remember. For example, the Maple equivalents to the above functions are called <code>ifactor</code>, <code>LPSolve</code>, <code>Int</code>, <code>numboccur</code>, <code>cfrac</code> and <code>GAMMA</code>.</p>	

International support

Mathematica	Details	Maple
Local language spellchecking	<p>Mathematica provides real-time spellchecking in over 25 languages.</p> 	Maple has English spellchecking only, and it isn't in real time.
Code captions	<p>Mathematica can automatically display captions over code to clarify its meaning in 12 different languages.</p> 	

Maple is a trademark of Waterloo Maple Inc.